



Attero Tech by QSC
Synapse D32Mi

Dante™/AES67 Networked Audio Interface - 32 channel inputs

Features

- 32 studio-grade mic/line preamps with line level capabilities
- Front panel for network audio level control
- High performance analog-to-digital conversion on terminal block connectors.
- Software selectable pad can be configured for professional (+4 dBu) or consumer (-10 dBV) input levels for each 16 channel input bank.




Applications: Live Sound • Stadiums • Recording Studios • Education • Conference Centers

The Synapse D32Mi a high-performance, high-channel density networked audio interface supporting Dante™ with AES67 interoperability. It features 32 studio-grade mic/line preamps and is designed to address the needs of a wide range of commercial audio connectivity applications. Also offers quick access to gain, mute and phantom power controls along with front panel headphone access for local input and Dante™ confidence monitoring.

A Q-SYS control plugin is available that enables simple integration of the Synapse D32Mi into the Q-SYS Ecosystem.

Application Example

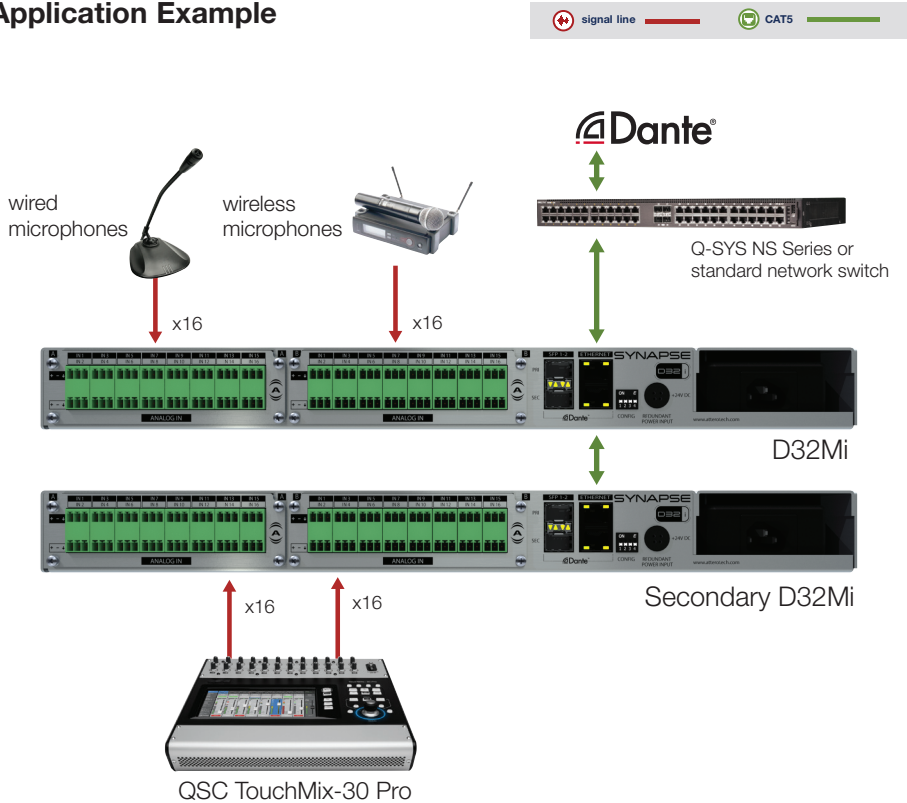

Synapse D32Mi Details

Specifications

Mic/Line Inputs

Maximum input level	+24 dBu (Pad active - Line mode)
Input impedance	2k Ω (mic) 10k Ω (line)
Input type	3-pin depluggable terminal block
Dynamic range	\geq 105 dB (pad on)
THD+N	\leq 0.005%, \leq 0.015% (max gain)
Frequency response	20 Hz to 20 kHz, +/- 0.5 dB

Analog Outputs

Maximum output level	+24 dBu
Output impedance	200 Ω
Input type	3-pin XLR-M
Dynamic range	n/a
THD+N	n/a
Frequency response	20 Hz to 20 kHz, +/- 0.5 dB

Headphone Output

Connector	1/4 in TRS jack
Controls	mute / volume encoder
Load	32 Ω minimum

Audio Networking

Protocol support	Dante™ with AES67 support
Channel count	32 Dante RX, 2 Dante RX
Modes	Switched or Redundant mode
Latency	0.250 ms minimum
Ports	2 - Gb copper on RJ-45, 2 - Gb SFP
Sample rates	16/24-bit, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz

Environmental

Power	110 V-220 V AC Input, with optional external 24 VDC redundant supply
Power consumption	<20 W

General

Dimensions (HWD)	1 RU form factor 1.75 x 19 x 12.5 in (44.5 x 482.6 x 508.0 mm)
Weight	6 lb (2.72 kg)
Operating temperature	0 to 40° C
Regulatory compliance	FCC 47CFR Parts 15B and 18 (Class A), EN 55011, ICES-003, CE (EN55032 Class A and EN55024 Class A)



QSC

1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174
 © 2020 QSC, LLC all rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark office and other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.

Synapse D32Mi Spec Sheet 1/14/2020

