

Q-SYS Core Processor

Quick Start Guide

Core 5200-G2 Enterprise Processor



TD-001584-01-A



Q-SYS Core Processor

Quick Start Guide

Core 5200-G2 Enterprise Processor



IMPORTANT SAFETY INSTRUCTIONS



- Read these instructions and keep a copy for future reference. Strictly follow and heed all instructions and warnings. Install the device only as instructed.
- Do not use or submerge this device in or near water or liquids.
- Clean only with a dry cloth. Do not use any aerosol spray, cleaner, disinfectant or fumigant on, near, or into the device.
- Do not install the device near any heat sources, such as radiators, heat registers, stoves, or other apparatus (including amplifiers).
- Refer all service to qualified personnel.
- Observe all applicable local codes. Consult a licensed professional engineer when devising an equipment installation to ensure compliance.

Maintenance and Repair

Advanced technology—e.g., the use of modern materials and powerful electronics—requires specially adapted maintenance and repair methods. To avoid subsequent damage to the equipment, personal injury, and/or creation of additional safety hazards, have all maintenance or repair work on the equipment performed only by a QSC authorized service station or an authorized QSC international distributor. QSC is not responsible for any injury, harm, or related damages that arise from any failure of the customer, owner, or user of the equipment to facilitate those repairs.

Hardware description

The Q-SYS Core 5200 is a high-performance Enterprise Processor built on the PowerEdge™ R740 enterprise server platform from Dell™. The PowerEdge R740 is Dell's 14th generation enterprise server platform and is one of the most trusted server platforms on the market today. The Core 5200 hardware is uniquely configured to meet the processing demands and low-latency, real-time performance of Q-SYS. The Core 5200 ships with the latest Q-SYS firmware and feature set pre-installed and with support for local and remote monitoring via familiar IT tools that only Q-SYS and the PowerEdge R740 can offer.

The Q-SYS Core 5200 comes with redundant boot media and with redundant hot-plug power supplies with active hot-spare technology as standard features. Also standard is QSC's 2.5" SATA SSD Q-SYS Media Drive for ample storage of media files.

Figures 1 through 3 illustrate the front and rear panels of the Q-SYS Core 5200.

For additional information regarding hardware specifications, regulatory compliance, or iDRAC9, visit the Dell server website at: www.Dell.com/servers.

For additional information regarding the Q-SYS Core 5200 and other software feature specifications, Q-SYS Designer and other Q-SYS Systems products or solutions, visit the QSC website at www.qsc.com.



– Figure 1 – Front panel with bezel


- | | |
|--|---|
| 1. Status and ID indicator (enabled via Q-SYS Designer Software) | 6. Power button |
| 2. Bezel lock | 7. VGA video output (female HD-15) |
| 3. Removable active bezel | 8. USB 2.0 host ports |
| 4. LCD navigation buttons | 9. Slide-out information tag ¹ |
| 5. LCD (displays Q-SYS Core name, status, or health alerts) | 10. Q-SYS 960 GB Media Drive ² |

¹ Includes the product serial number and Q-SYS support contact information.

² The Q-SYS Core 5200 Enterprise Processor comes with an MTP-16 16-track audio player as a standard feature. Upgrades to 32, 64, and 128 tracks are available.



– Figure 2 – Front panel with bezel removed

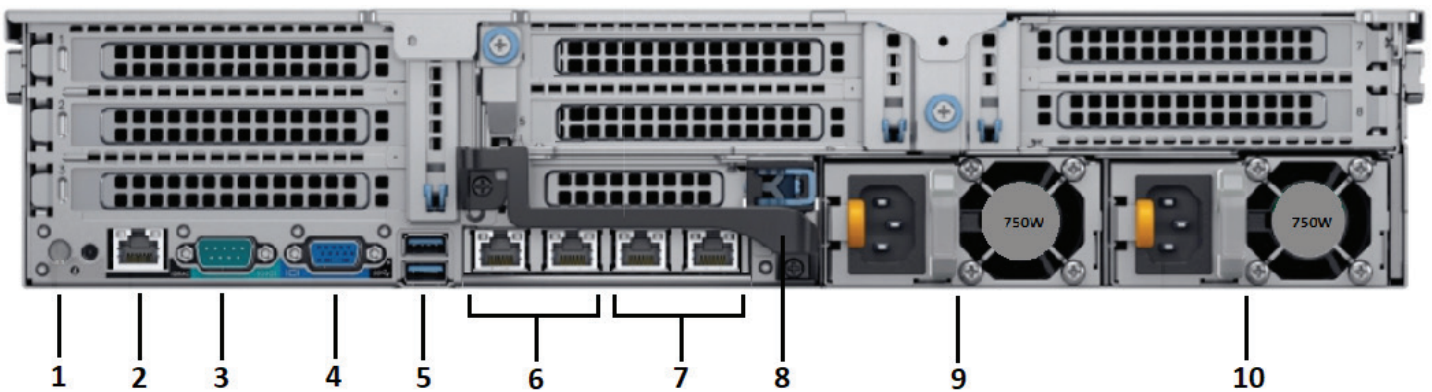

– Figure 3 – Rear panel features

- | | |
|---|---|
| 1. ID indicator (enabled via Q-SYS Designer Software) | 6. Q-SYS LAN A and LAN B multimedia ports (two RJ45) |
| 2. iDRAC9™ Enterprise Port (RJ45) ¹ | 7. Q-SYS AUX ports (two RJ45) |
| 3. Serial communications RS232 (male DE-9) | 8. Rear handle |
| 4. VGA video output (female HD15) | 9. Power supply unit 1 (750 W, universal AC voltage) |
| 5. USB 3.0 host ports | 10. Power supply unit 2 (750 W, universal AC voltage) |

¹ The iDRAC9 port is configured with the default IP address 192.168.0.120.

Default username: **root** Default password: **calvin**

**Mailing Address:**

QSC, LLC
1675 MacArthur Boulevard
Costa Mesa, CA 92626-1468 USA

Main Number: +1 (714) 754-6175

World Wide Web: www.qsc.com

Sales & Marketing:

Voice: +1 (714) 957-7100 or toll free (US only) (800) 854-4079

FAX: +1 (714) 754-6174

E-mail: info@qsc.com

Q-SYS™ Customer Support**Application Engineering and Technical Services**

Monday - Friday 7 AM to 5 PM Pacific Time (Excludes holidays)

Tel. 800-772-2834 (US only)

Tel. +1 (714) 957-7150

Q-SYS 24/7 Emergency Support*

Tel: +1-888-252-4836 (US/Canada)

Tel: +1-949-791-7722 (non-US)



*Q-SYS 24/7 Support is only for emergency assistance with Q-SYS systems. 24/7 support guarantees a call back within 30 minutes after a message is left. Please include your name, company, call back number, and a description of the Q-SYS emergency for prompt call back. During business hours, however, please use the Application Engineering and Technical Services numbers at left.

Q-SYS Support Email

qsysupport@qsc.com

(Immediate email response times not guaranteed)

QSC

Technical Services

1675 MacArthur Blvd.

Costa Mesa, CA 92626 USA

Tel: 800-772-2834 (US only)

Tel: +1 (714) 957-7150

FAX: +1 (714) 754-6173

© 2018 QSC, LLC. All rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark office and other countries. Q-SYS is a trademark of QSC, LLC. in the U.S. Patent and Trademark office and other countries.

Dell, EMC, and PowerEdge are trademarks of Dell Inc. All other trademarks are the property of their respective owners.

<http://patents.qsc.com>.